

FIG. 1

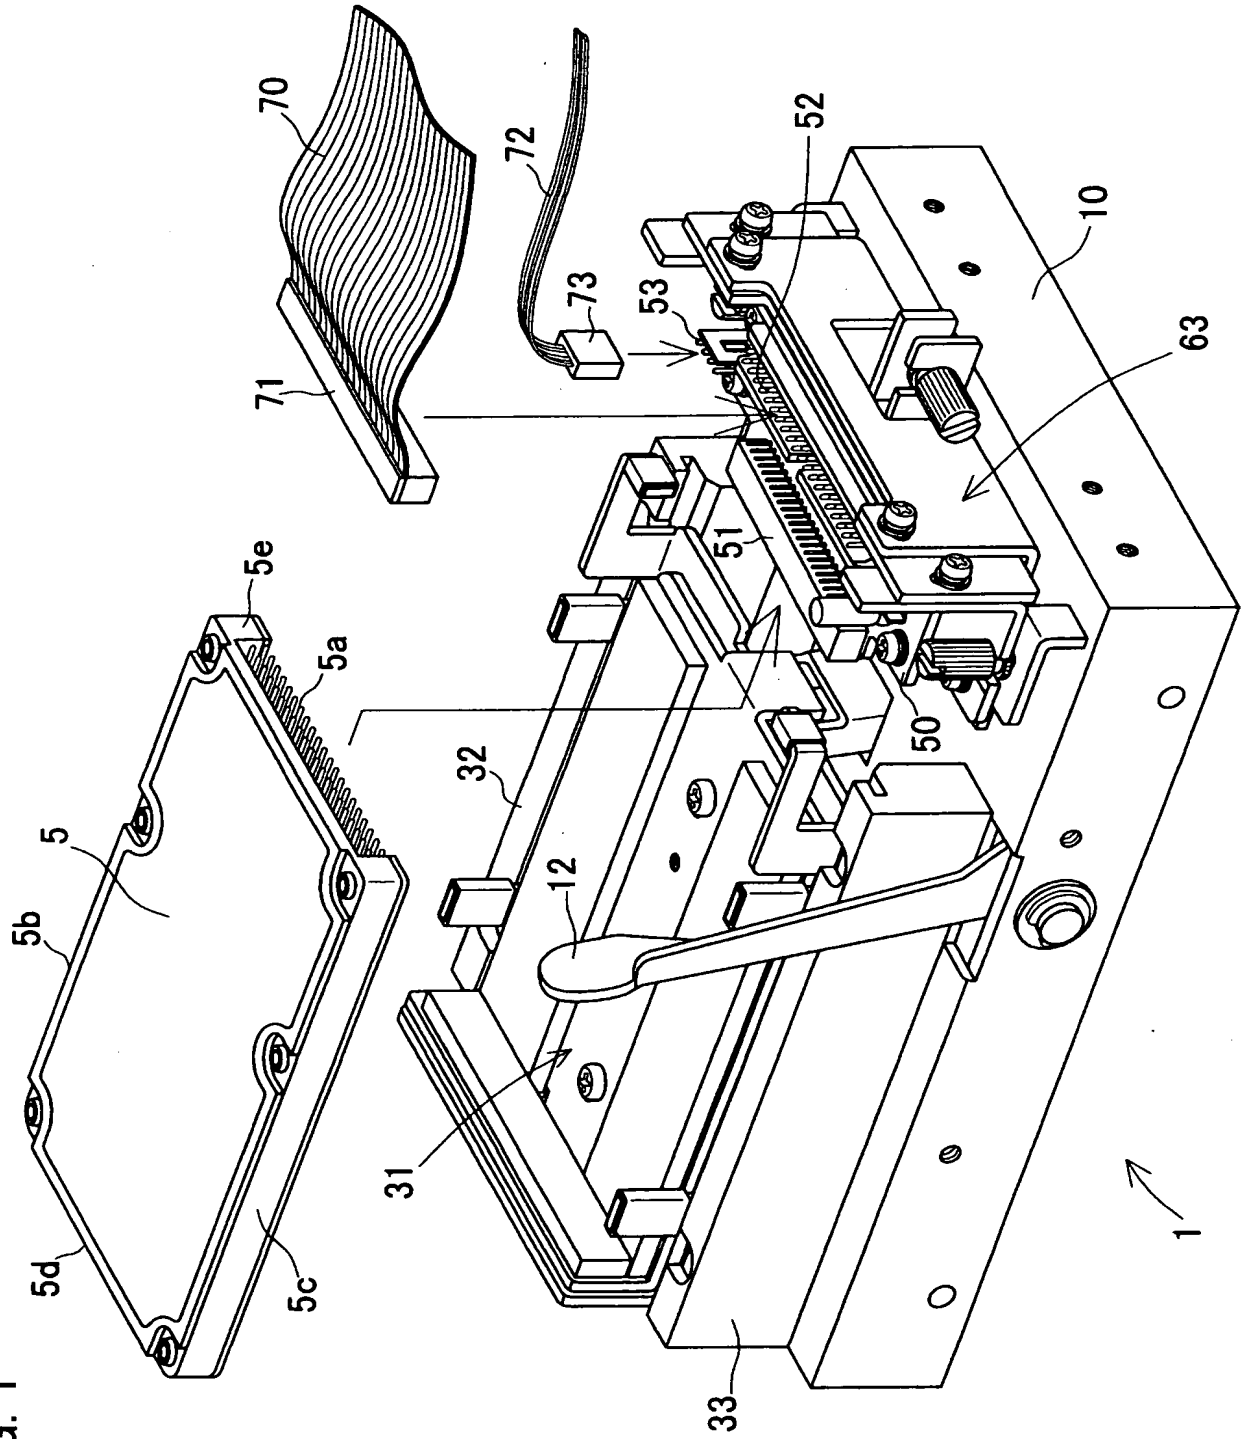


FIG. 2A

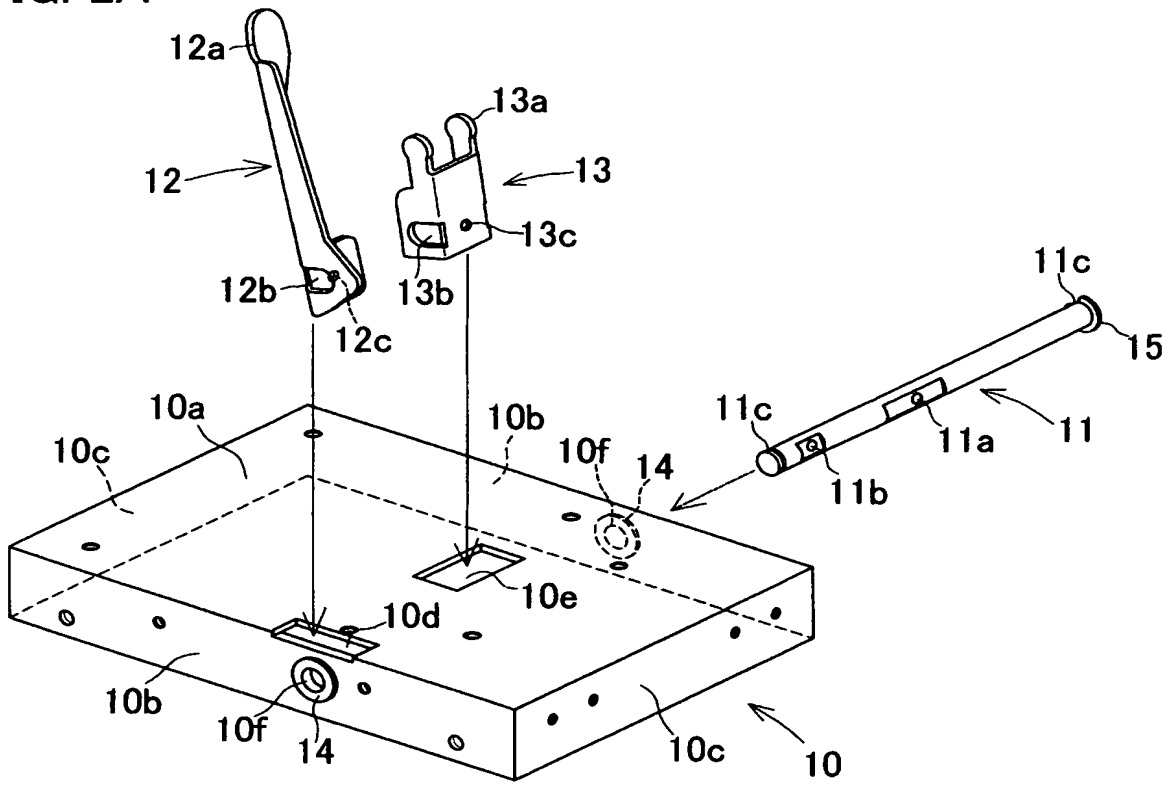


FIG. 2B

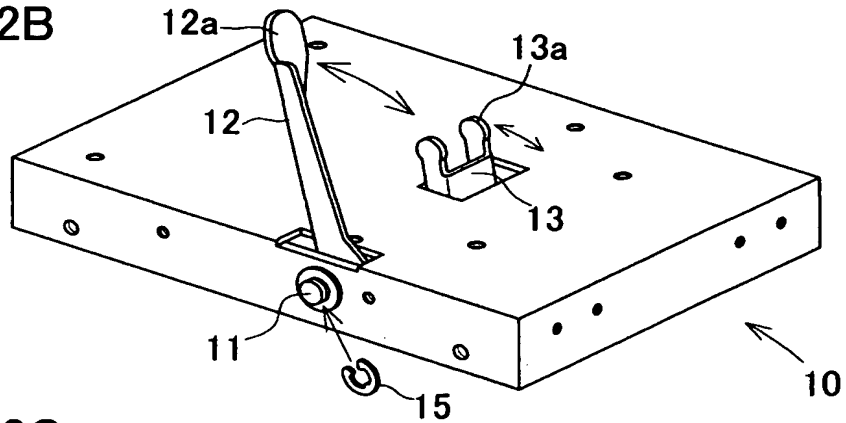


FIG. 2C

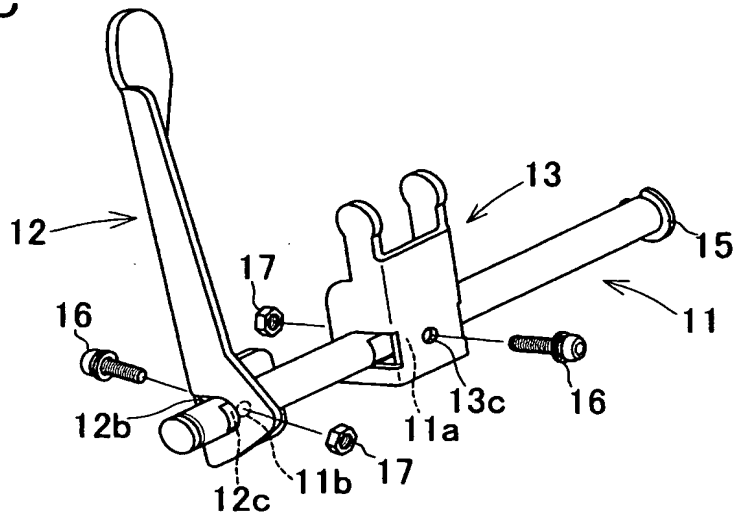


FIG. 3A

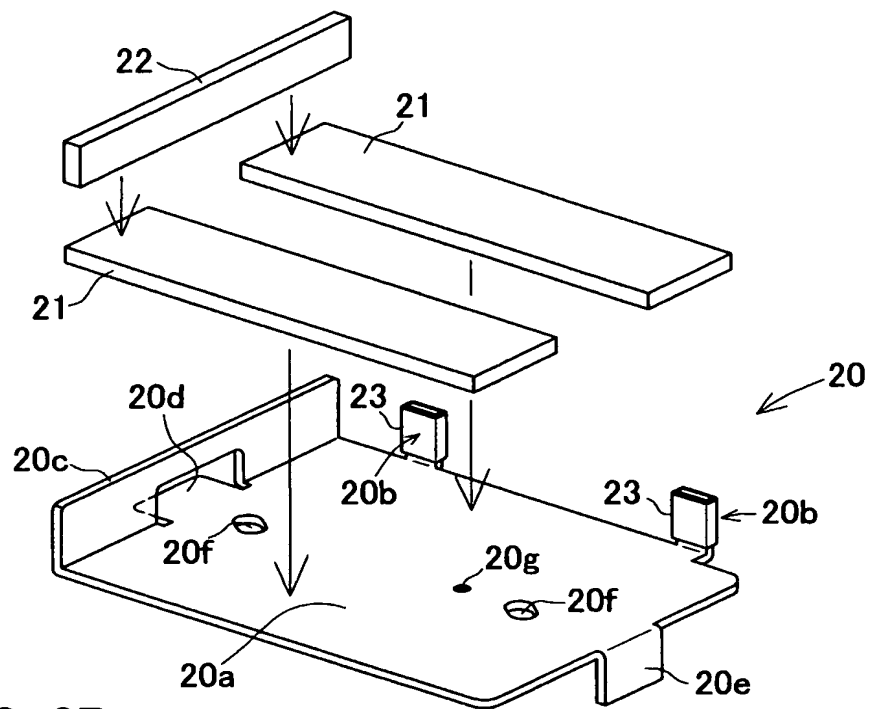


FIG. 3B

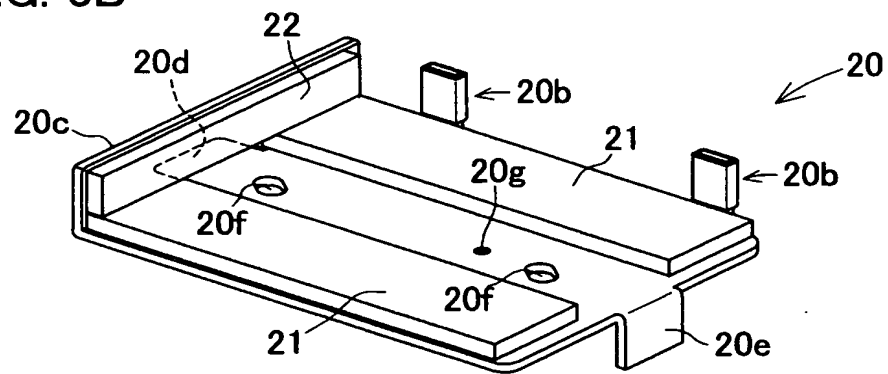


FIG. 4

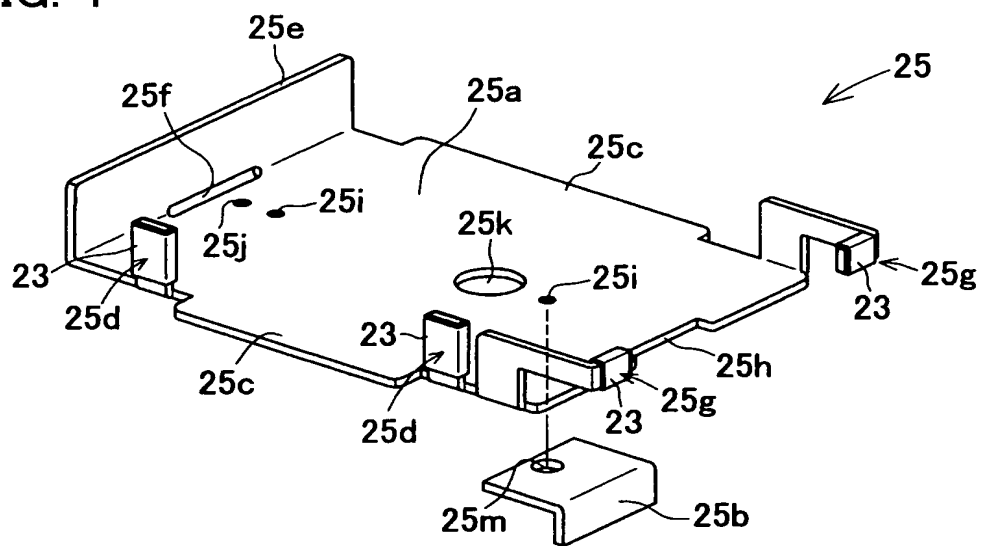


FIG. 6A

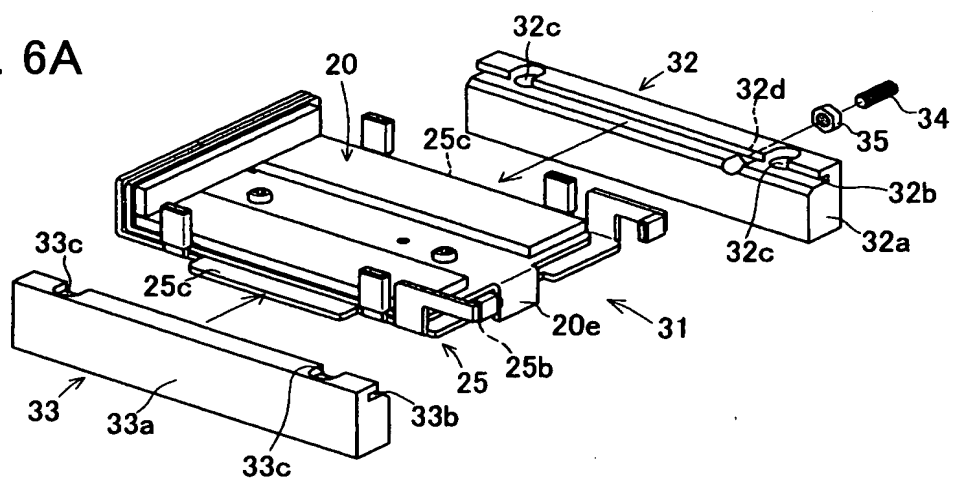


FIG. 6B

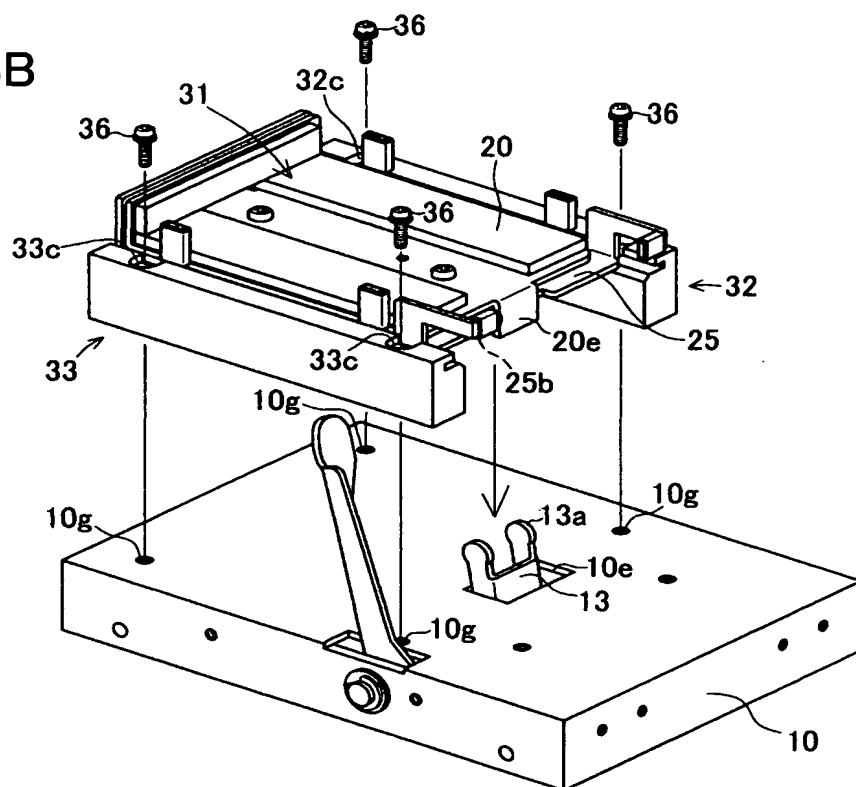


FIG. 6C

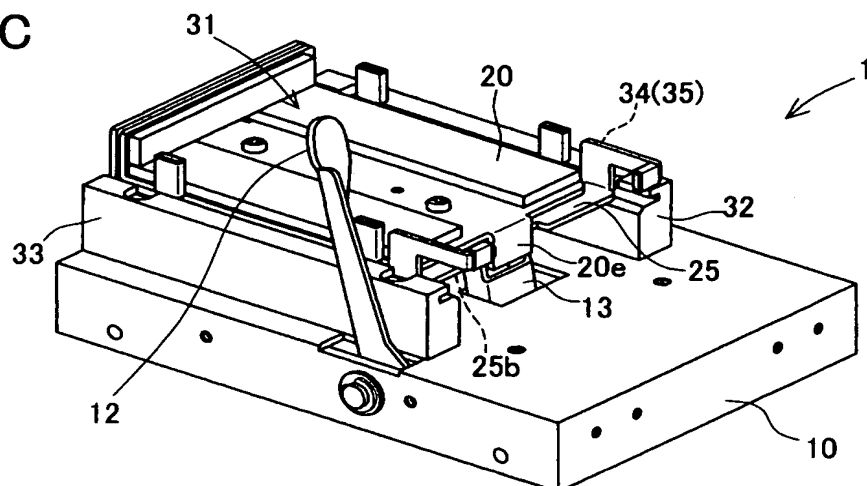


FIG. 8A

FIG. 8B

FIG. 8B is a perspective view of the device 10, showing the internal components and the base 10. The device 10 is a rectangular block with a circular feature on the left side. The internal components include a base 10, a support structure 51, a sliding mechanism 55, and a locking mechanism 56. The sliding mechanism 55 is shown in a retracted position, and the locking mechanism 56 is shown in a locked position. The device 10 is shown in a perspective view, and the base 10 is shown in a perspective view.

FIG. 9A

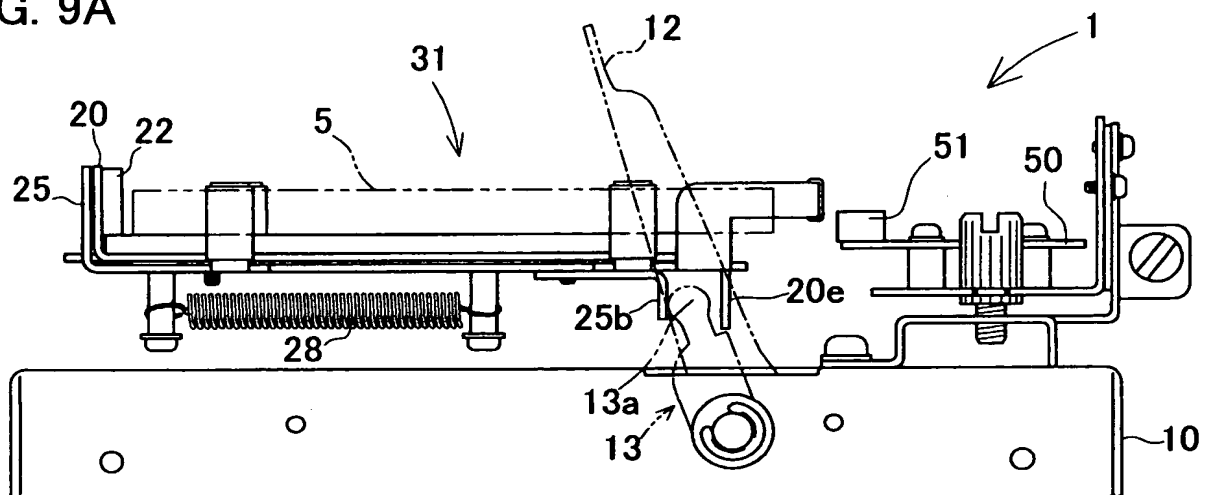


FIG. 9B

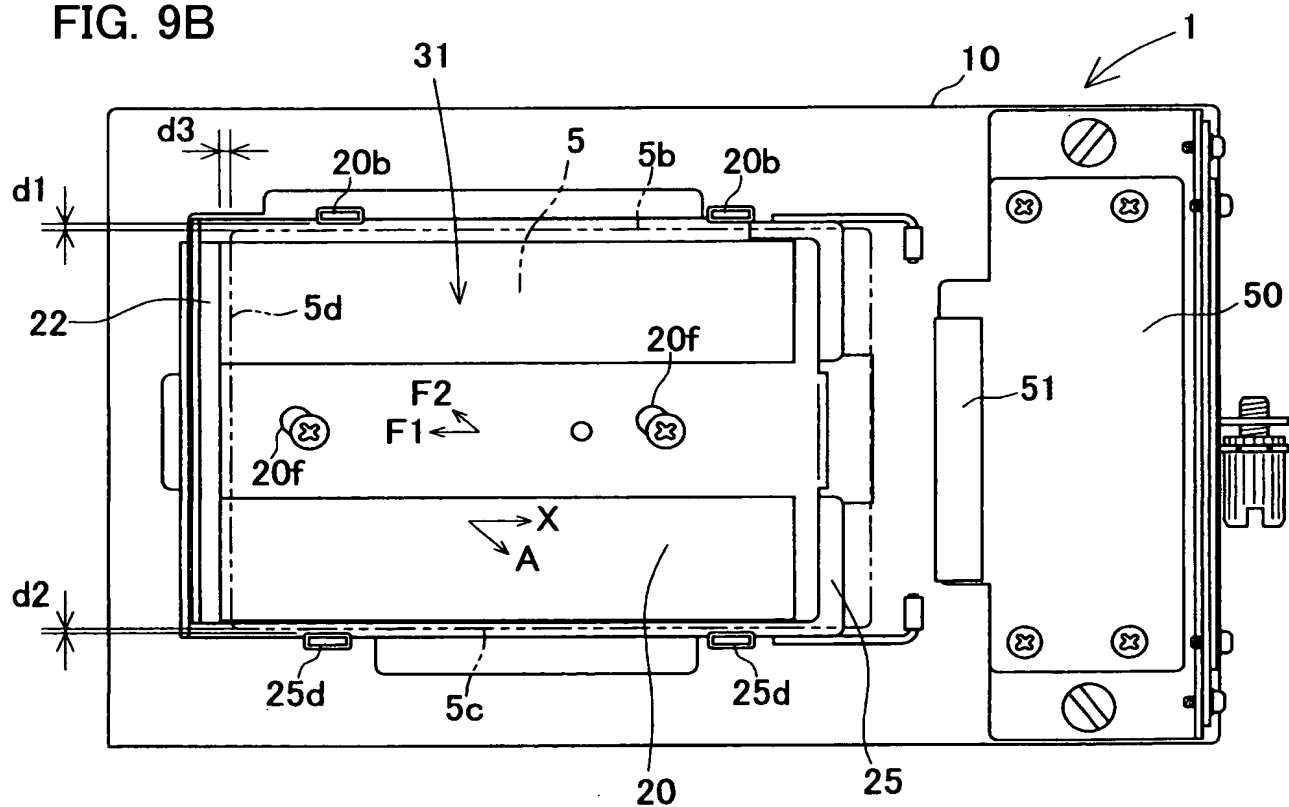


FIG. 10A

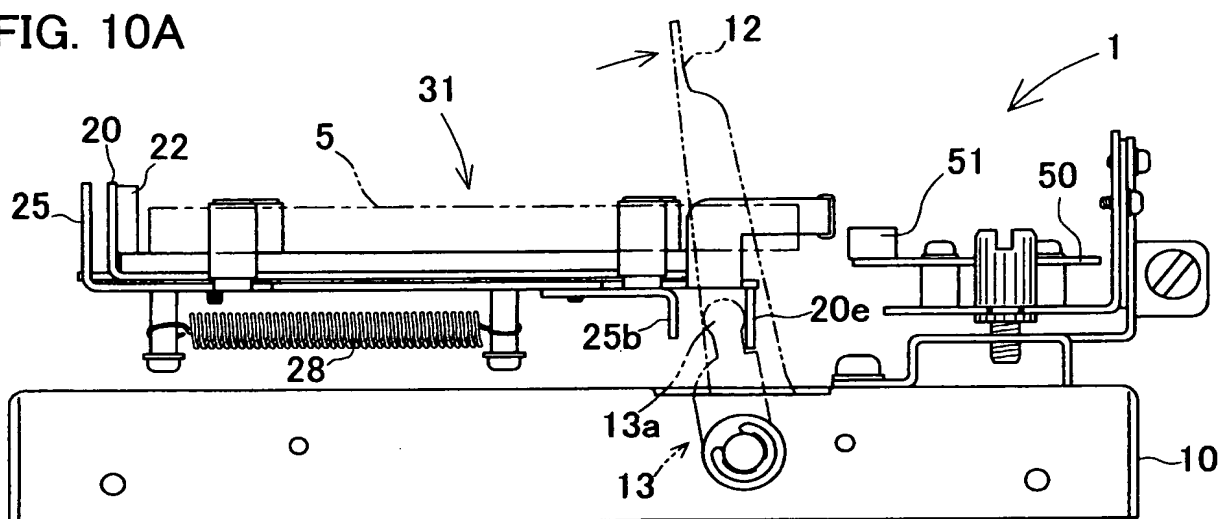


FIG. 10B

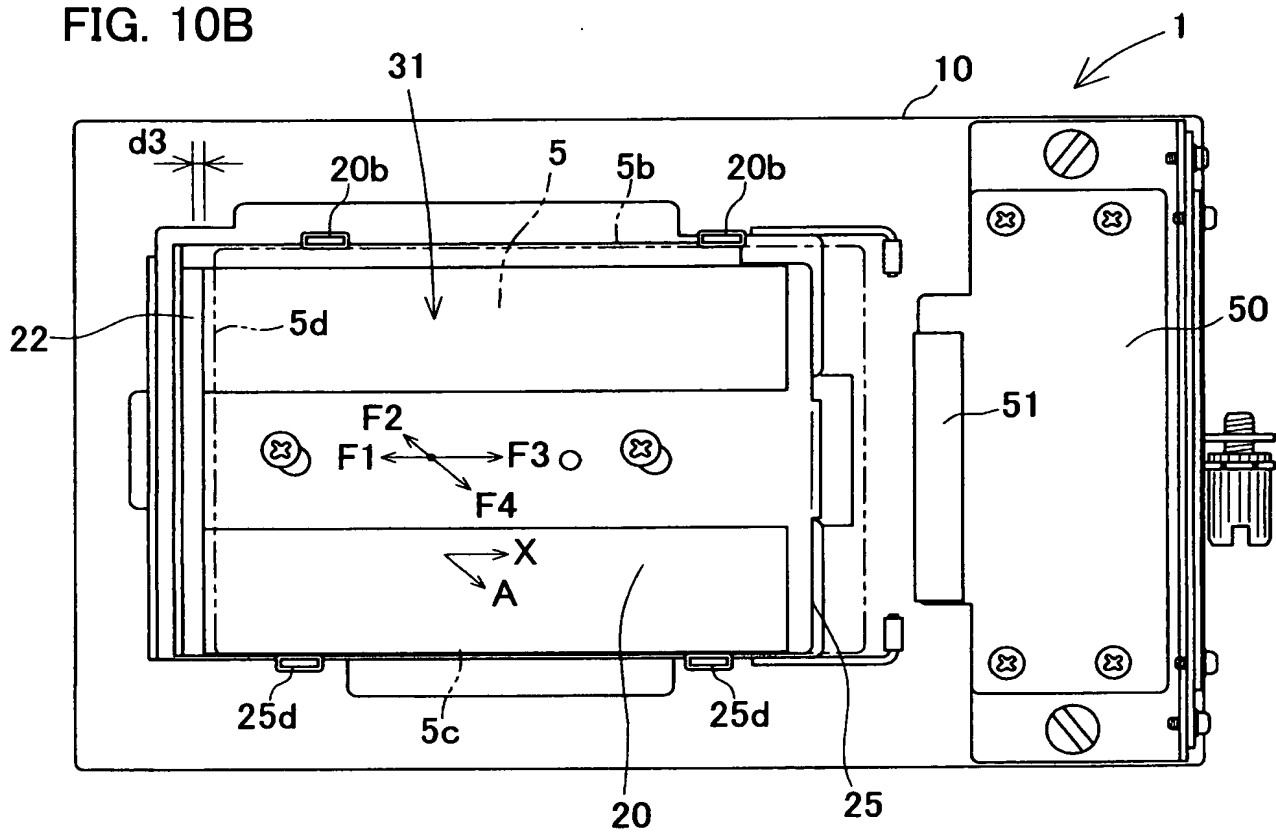


FIG. 11A

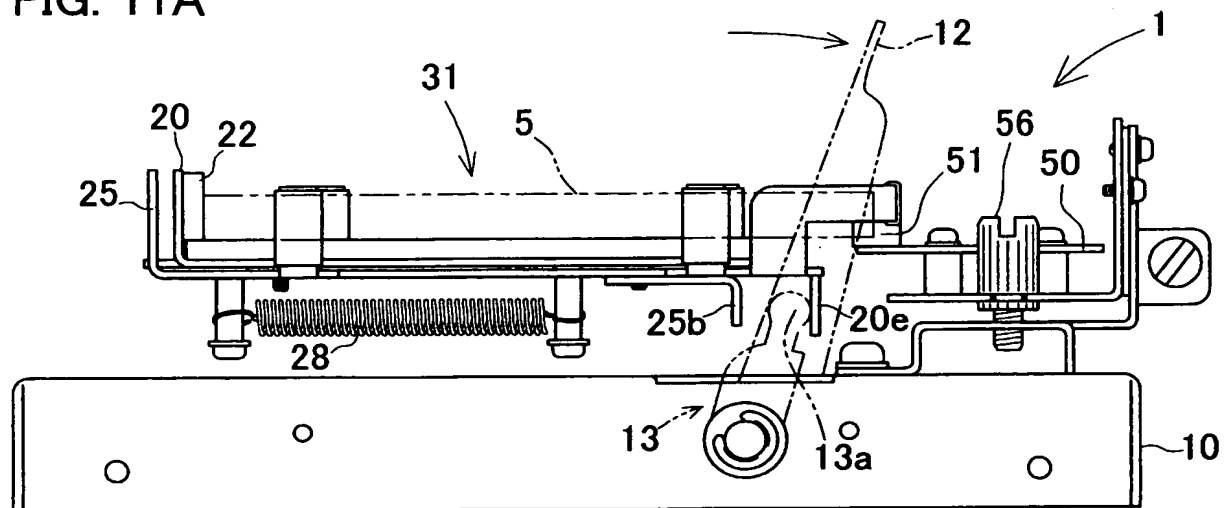


FIG. 11B

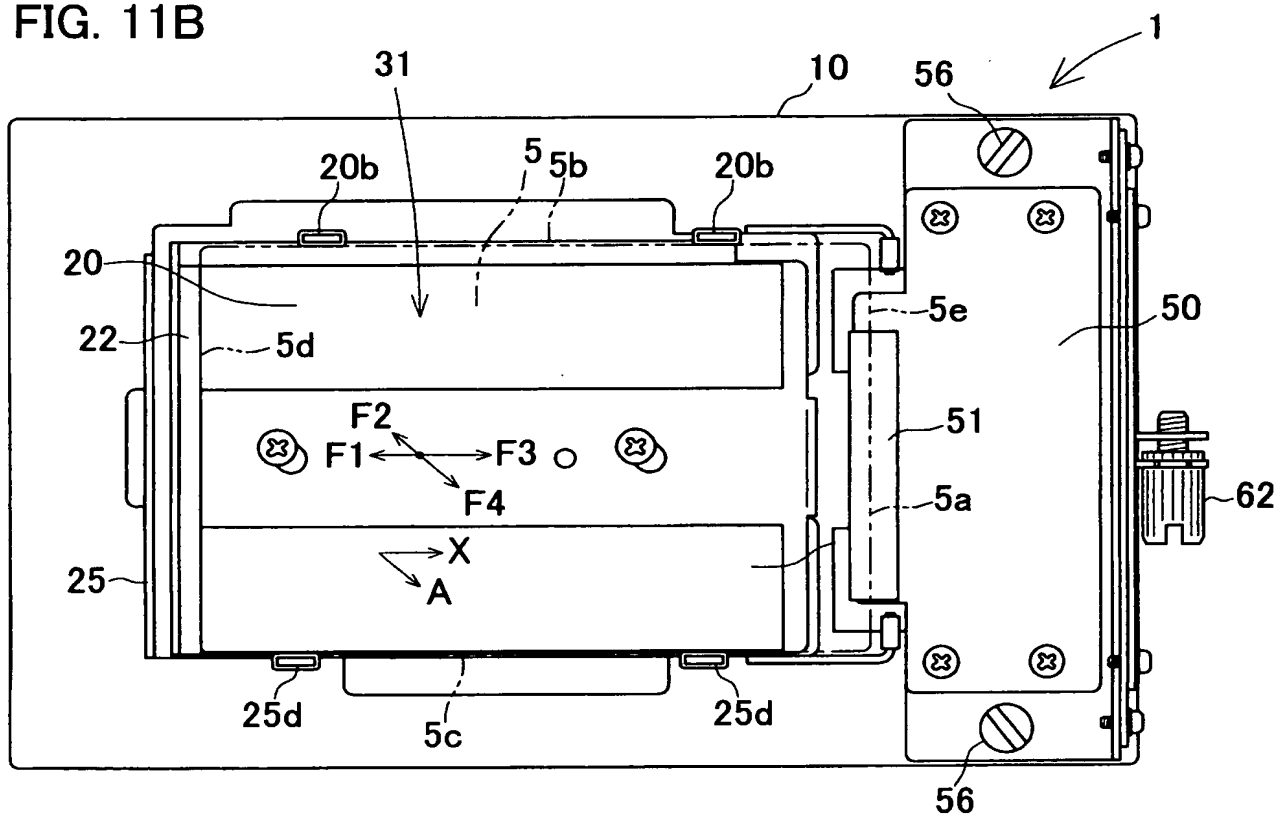


FIG. 12A

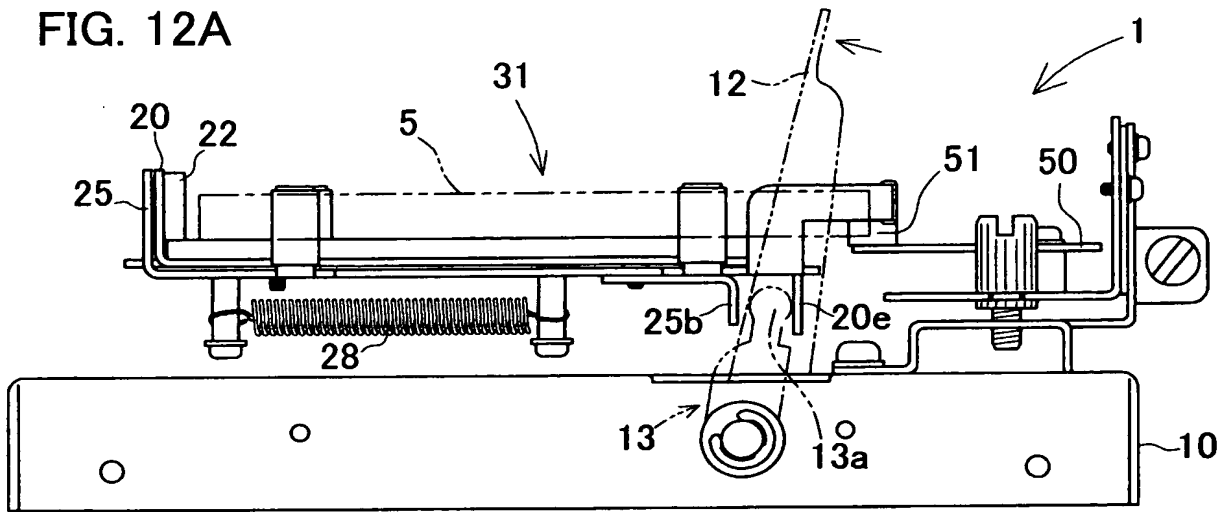


FIG. 12B

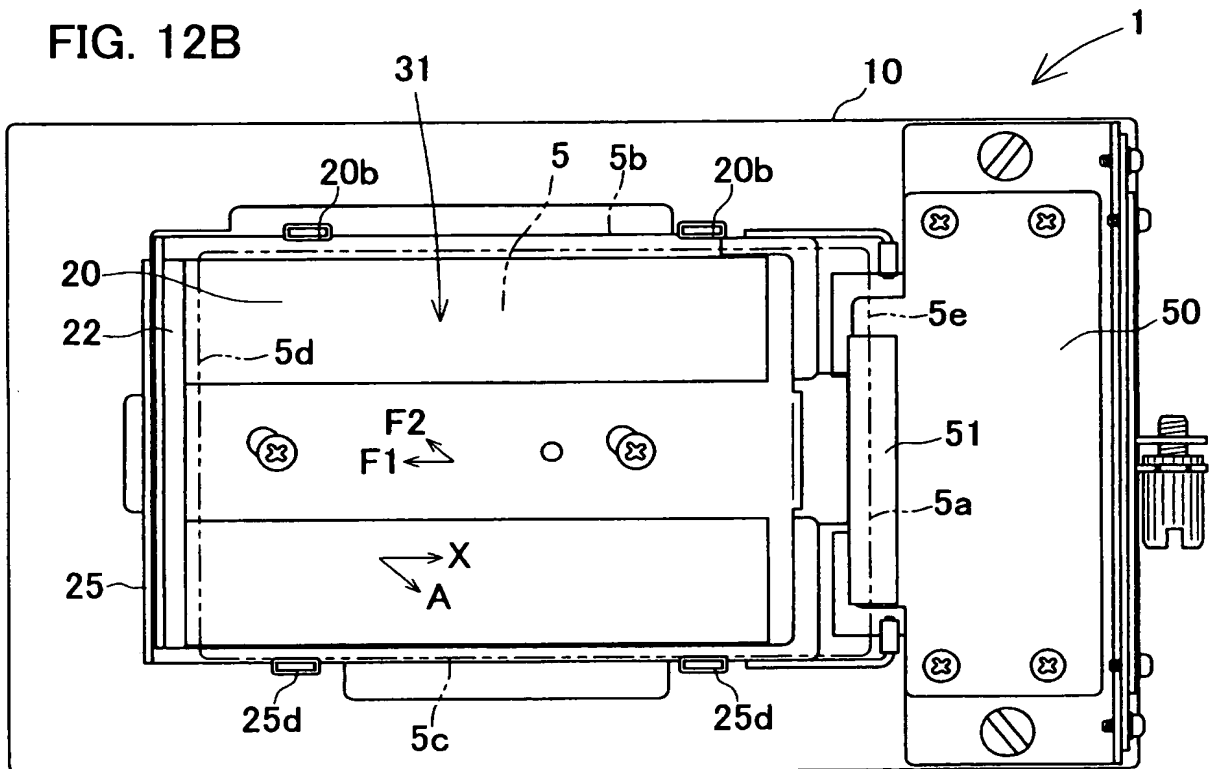


FIG. 13A

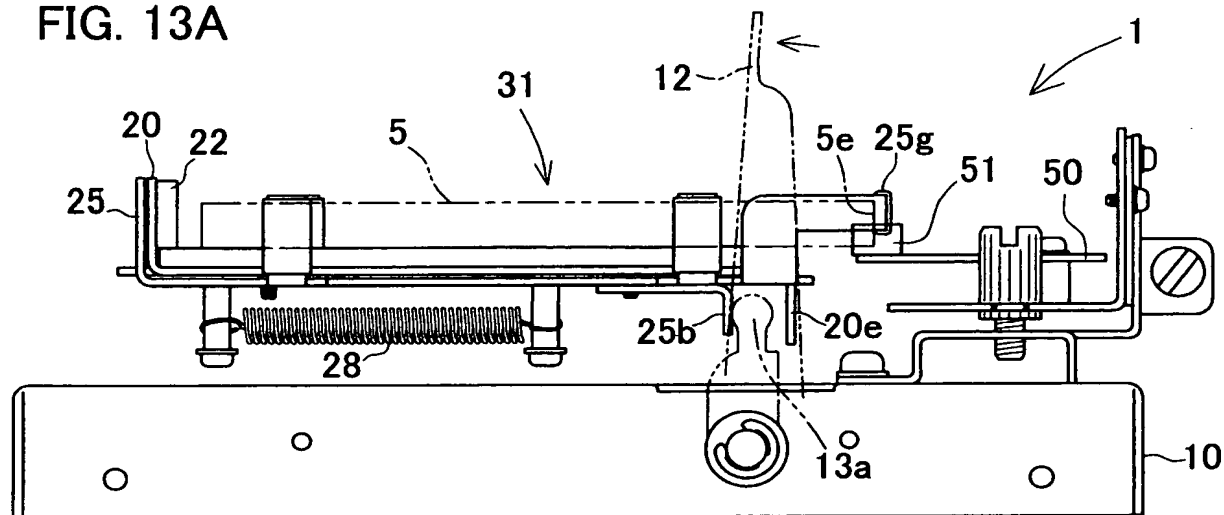


FIG. 13B

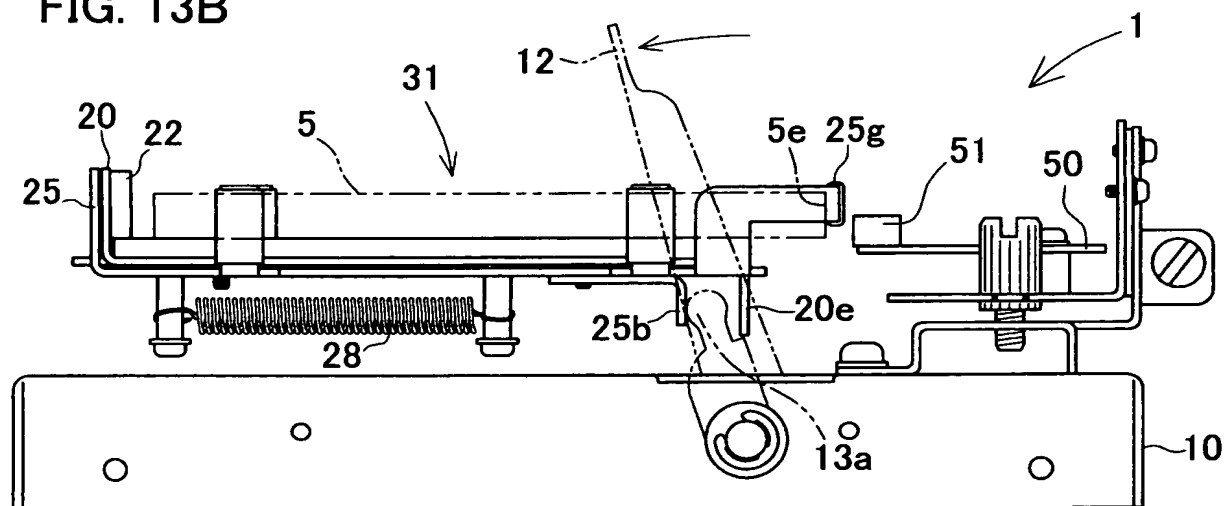


FIG. 14A

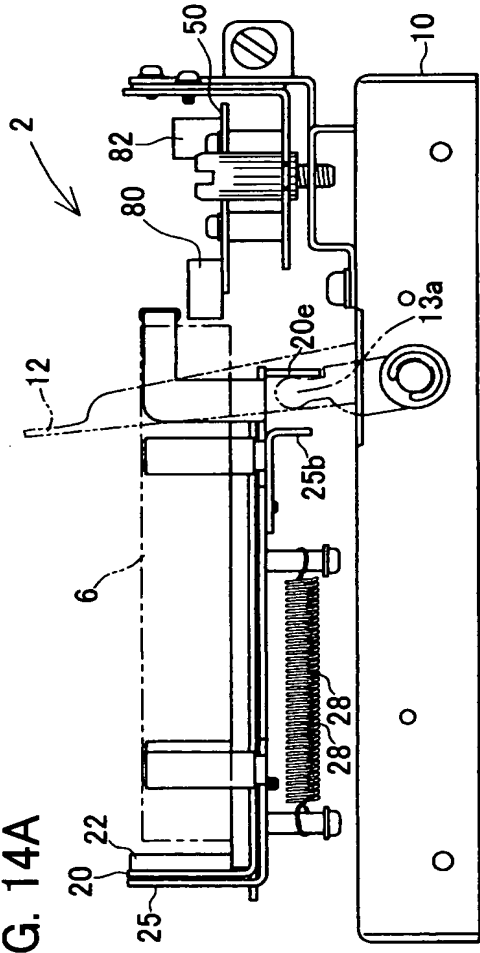


FIG. 14B

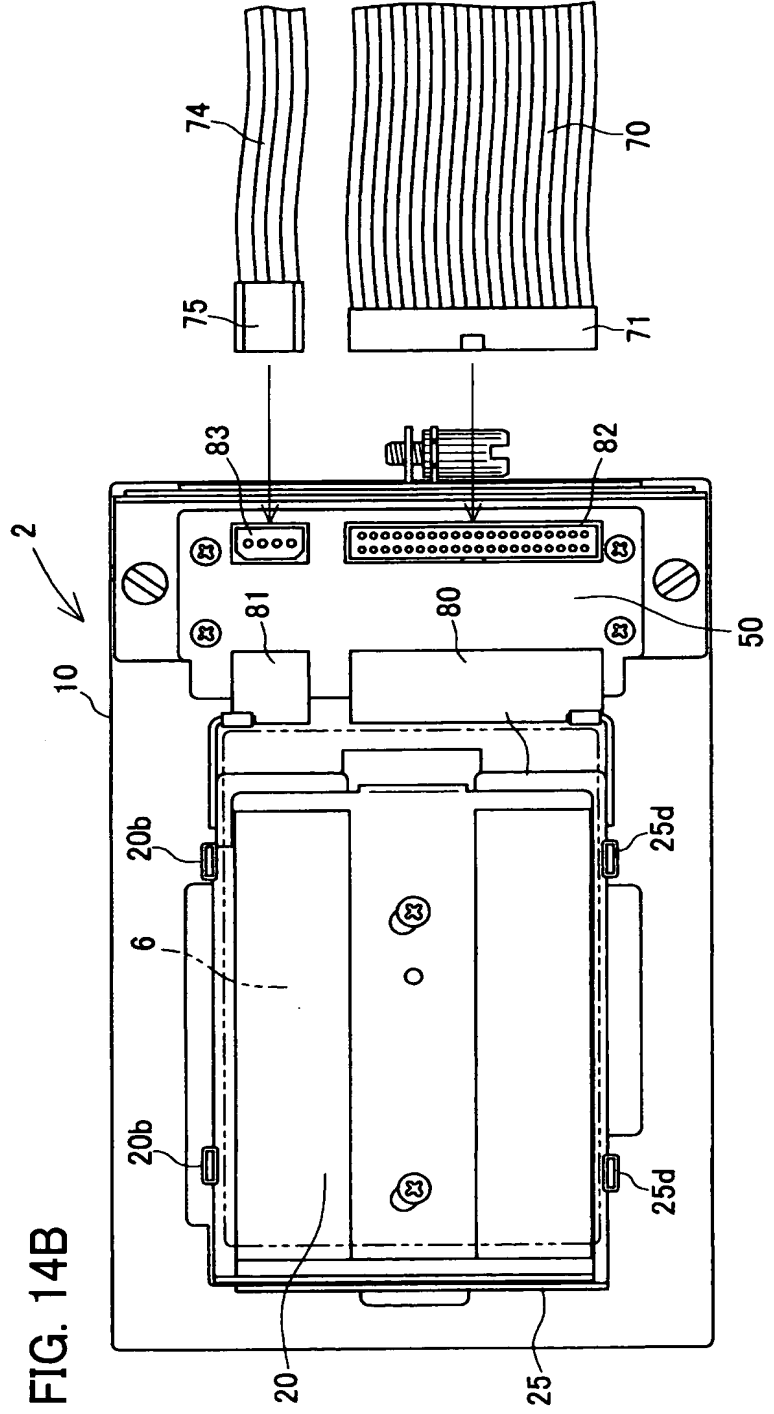


FIG. 15

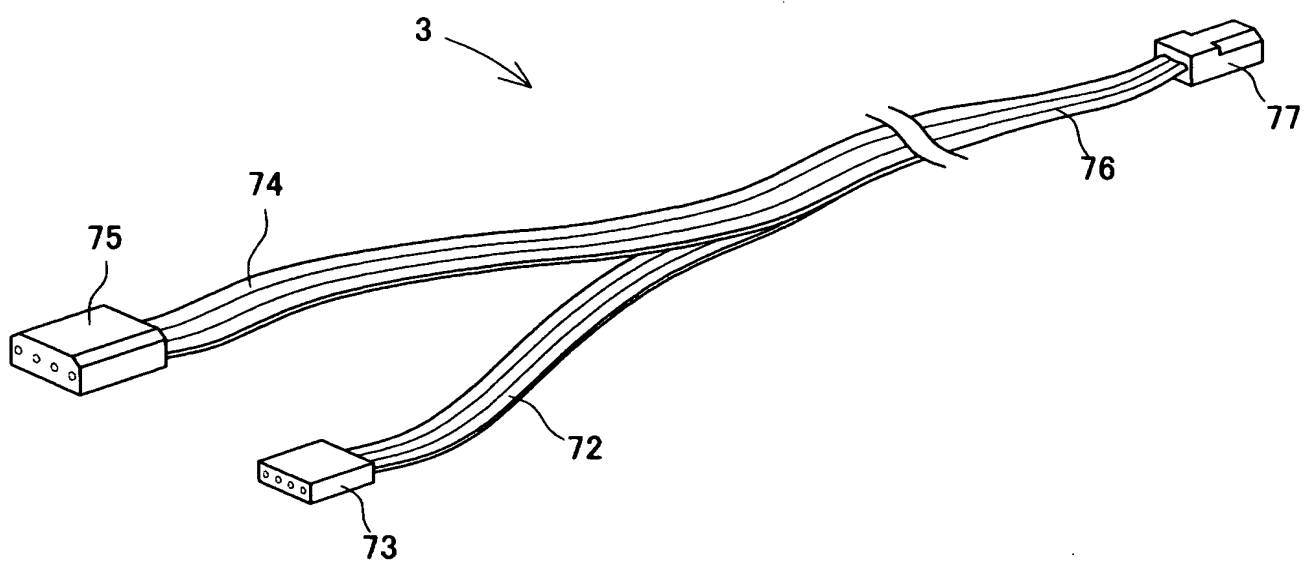


FIG. 16

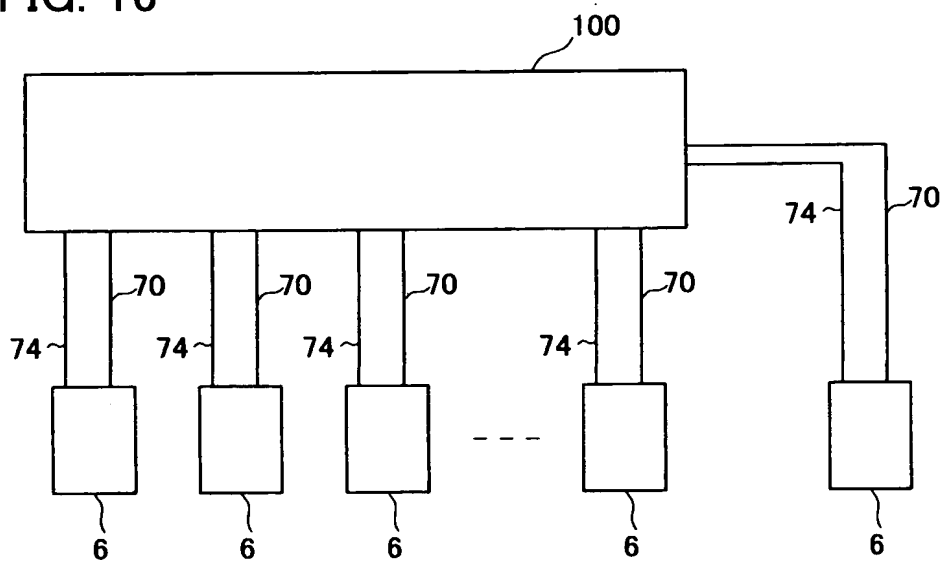


FIG. 17

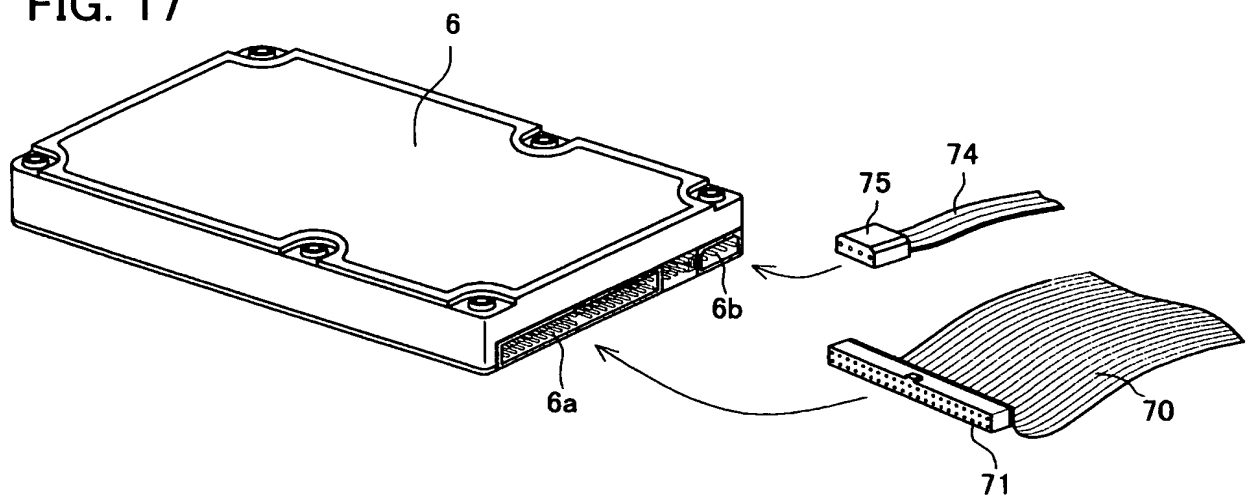


FIG. 18

